



## NES-200

### GX1-300 Embedded System with single LAN & DC Power Adapter Input

#### Features

- Fanless and low power consumption design
- One PS/2 KB/MS
- 128MB RAM inside
- One VGA
- One LAN
- 2USB(V1.1)
- One CompactFlash Slot
- Space for one 2.5" HDD
- DC input +5V Only
- 2 LED Indicators (Power, CF/HDD)
- Dimensions : 123 x 120 mm



#### Specifications

**CPU Board:** GX1-300MHz CPU with heat sink.128MB RAM inside  
One So-DIMM socket up to 512MB

CS5530, supports CRT and TFT LCD

**I/O Outlets:** 2 Serial Port (RS-232)

1 PS/2 Keyboard/Mouse

2USB

1 LAN (10/100 BASE-TX)

**Storage Bay:** One 2.5" HDD space, and 1 CompactFlash slot.

**LED Indicators:** 1 power LED , 1 HDD/CF access LED

**Power Req.:** DC +5V Only– 2.0A maximum. (Without 2.5" HDD)

**Operating Temperature:** 0~45 degree C. (32~113 degree F.)


**Dimensions:** 123.0mm (D) x 120.0mm (W) x 44.0 mm (H)

**Accessory:** 1 AC-DC 5V adapter with power cable.

**Optional Item:** -2.5" HDD housing kit

**CBL-COM-**Serial port adapter cable

**CBL-KB+MS-**Y type keyboard and mouse adapter cable

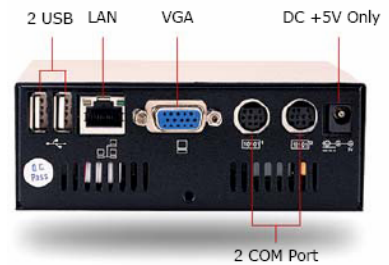

#### Ordering Information

Model	Description	Accessories
NES-200	GX1-300 Embedded System with single LAN, DC Power Adapter Input	* 1 AC-DC 5V adapter with power cable

